

## SPECIFICATIONS:

The Chest Ascender STec is manufactured in Aluminum, with parts of carbon steel. The block system works even in extremely conditions of wet and/or dirt. The hand ascender works with rope from 8mm to 12mm od diameter. When pushed on the arrow direction, slip and when pulled your system block. Your safety work load is 100kg and your breaking strength is 4kN.

### CHEST ASCENDER

Ø	8 - 12 mm
CE	1019
EN	567
COLOR	BLUE
COD:	AP01



FRONT

BACK

The Chest Ascender STec are used for rope progression, with easy installation, and used on ropes for 8mm to 12mm kernmantle. Do not use on steel wire.

## ADDITIONAL INFORMATION

Safety Work Load: 100kg

Breaking Strength: 4kN

Materials:


Aluminum, Carbon Steel and Rubber

Certification:

EN 567 / UIAA / CE 1019

Weight: 160g

### DESENHOS TÉCNICOS

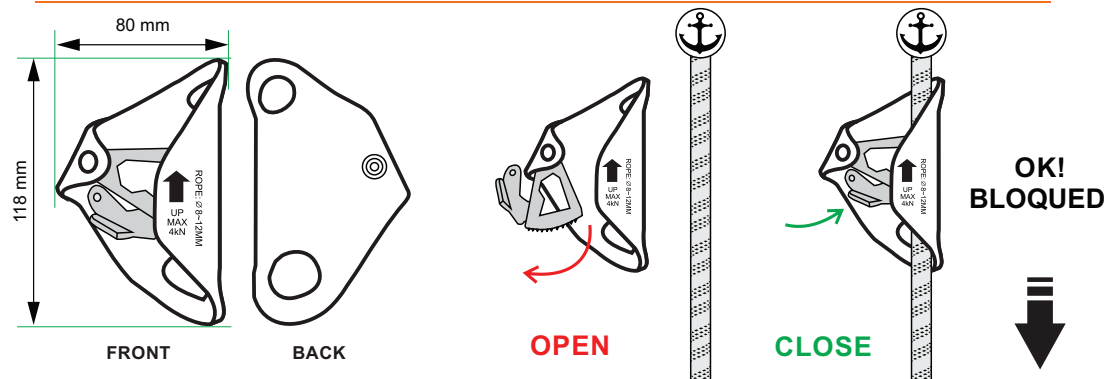

## NECESSARY CAUTIONS:

- Avoid contact with chemical products that may damage to the equipment
- Do not make any repair or modification on the equipment
- Realize periodic inspections on the equipment and note on a registration sheet
- In case of any doubt about the integrity of the equipment, do not use the same.